


NOTES:

- 1) Ground, Supply Voltage, Lock Alarm, and ϕ Voltage are solderable terminals.
- 2) RF Output is a field replaceable SMA (F) (2.92 mm above 26.5 GHz).
- 3) Dimensions are subject to change in the interest of product improvement

DATE	REVISION	CHANGES	APPROVED
9/11/03	3	CHANGED FREQ RANGE	BB

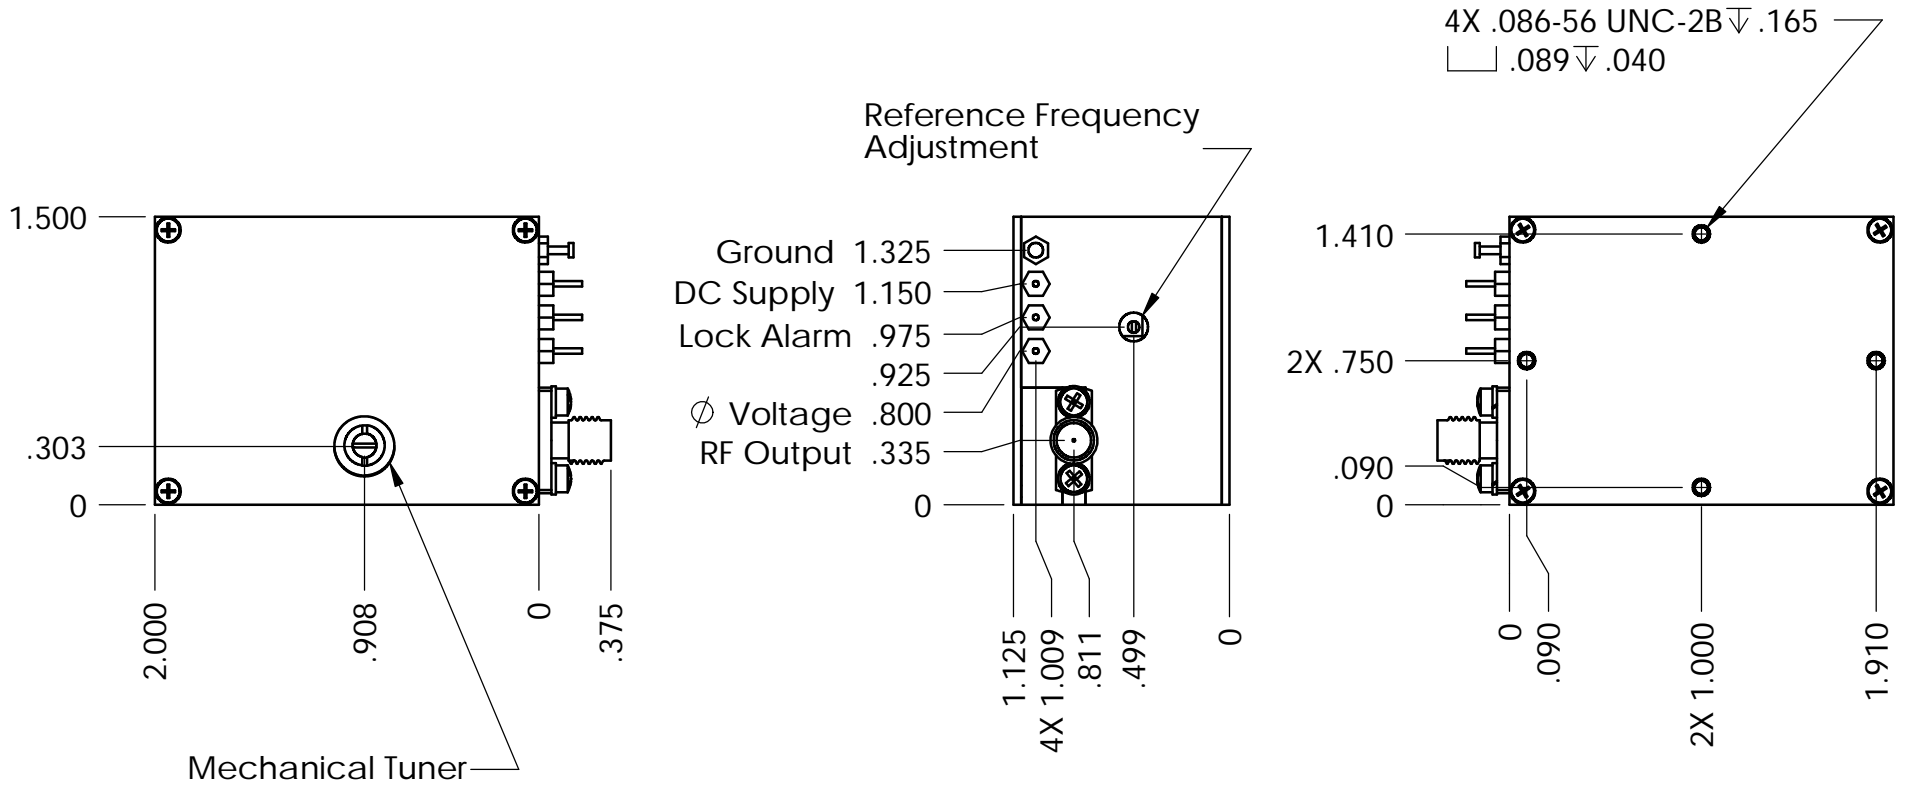

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
	$\pm .010$	
	$\pm .01$	

MATERIAL: n/a
 FINISH: n/a
 DO NOT SCALE DRAWING

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE

APPROVALS	DATE
DRAWN B.Bufford	6/26/03
CHECKED	
RESP ENG B.Bufford	6/26/03
MFG ENG	
QUAL ENG	

Lucix Corporation
 ALL INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE LUCIX CORPORATION.

**Outline,
 16-24, 32-44GHz
 IRDRO**

SIZE A	DWG. NO. 4DG008-1	REV. 3
SCALE 1:1		CAD FILE: OL_14_26&34_44_IR_All SHEET 1 OF 1